

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
28 December 2000 (28.12.2000)

PCT

(10) International Publication Number
WO 00/79042 A1

(51) International Patent Classification⁷: **D21F 3/02**

[FI/FI]; Päivärinteentie 13 A 6, FIN-04250 Kerava (FI).
TORVI, Timo [FI/FI]; Wärtsiläkatu 76 B 40, FIN-04440
Järvenpää (FI). **LEPPÄKOSKI, Helena** [FI/FI]; Sirukuja
6, FIN-04440 Järvenpää (FI).

(21) International Application Number: **PCT/IB00/00732**

(22) International Filing Date: **31 May 2000 (31.05.2000)**

(74) Agent: **FORSSÉN & SALOMAA OY**; Yrjönkatu 30,
FIN-00100 Helsinki (FI).

(25) Filing Language: **Finnish**

(81) Designated States (*national*): **BR, CA, JP, US.**

(26) Publication Language: **English**

(30) Priority Data:
991272 **3 June 1999 (03.06.1999) FI**

(84) Designated States (*regional*): European patent (AT, BE,
CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC,
NL, PT, SE).

(71) Applicant (*for all designated States except US*): **VAL-
MET-KARLSTAD AB** [SE/SE]; Axel Johnsons väg 6,
S-651 15 Karlstad (SE).


Published:
— *With international search report.*

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): **HASANEN, Kari**

*For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.*

(54) Title: **METHOD AND ARRANGEMENT FOR POSITIONING A SHOE OF A SHOE PRESS/SHOE CALENDER IN A
PAPER MACHINE**

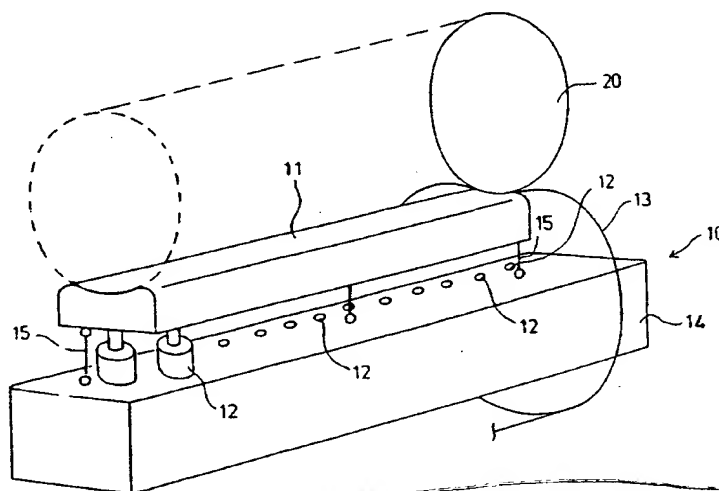

(57) Abstract: The invention relates to a method for positioning a shoe of a shoe press / shoe calender in a paper machine. In the method, the position of the shoe (11) of the shoe calender / shoe press is measured and, based on the results of the measurement, the position of the shoe is controlled so as to be as desired in the direction of nip compression. The invention also relates to an arrangement for positioning a shoe of a shoe press / shoe calender in a paper machine, which arrangement comprises a shoe roll (10) or equivalent which includes a shoe (11) and hydraulic cylinders (12) connected thereto for moving the shoe (11). The arrangement comprises further at least two measuring devices (15) for measuring the position of the shoe (11) and means (12) for controlling the position of the shoe (11) based on the results obtained by means of the measuring devices so as to be as desired in the direction of nip compression.

205050 "F9008660

WO 00/79042 A1